







LINDURA WOOD FLOORING
THE ORIGINAL FROM MEISTER


Large format.
Impressive.
Durable.
The new Lindura
wood flooring
is impressive in
all areas – a real
statement in
gorgeous wood.


High-tech flooring or genuine natural materials? Lindura wood flooring is a fascinating combination of the two. The secret is our innovative wood powder technology that turns a simple floor covering into truly high-tech wooden flooring. Wood powder is a mix of materials, including fine wood fibres, mineral components, and other natural additives; it is fused to a real wood covering layer, an HDF middle layer, and a backing layer under high pressure and heat. This creates planks that are resistant to pressure, pleasantly warm to the foot, durable and easy to maintain.

Visually, Lindura wood flooring is in a league of its own. The floors that come in rustic grading and authentic grading stand out with their expressive surfaces that are somewhat reminiscent of a 'used' look. With a rich variety of hues and a naturally oiled finish, each plank is a greeting from nature and is unique from every perspective. Those who prefer things a little less rustic can opt for a more subtle grading and a matt lacquered surface: It makes a perfectly harmonious impression!

Regardless of the surface, all Lindura variants have one thing in common: These impressive planks come in a format that is rather unique in the wood flooring segment – for rooms full of character and space.



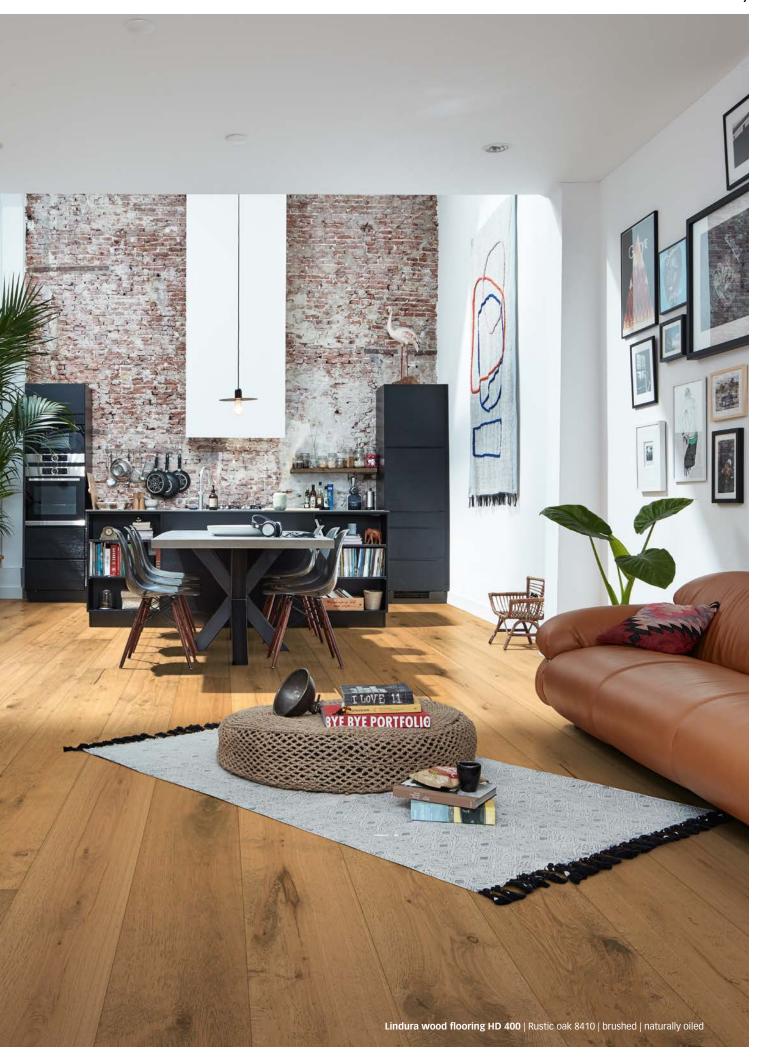

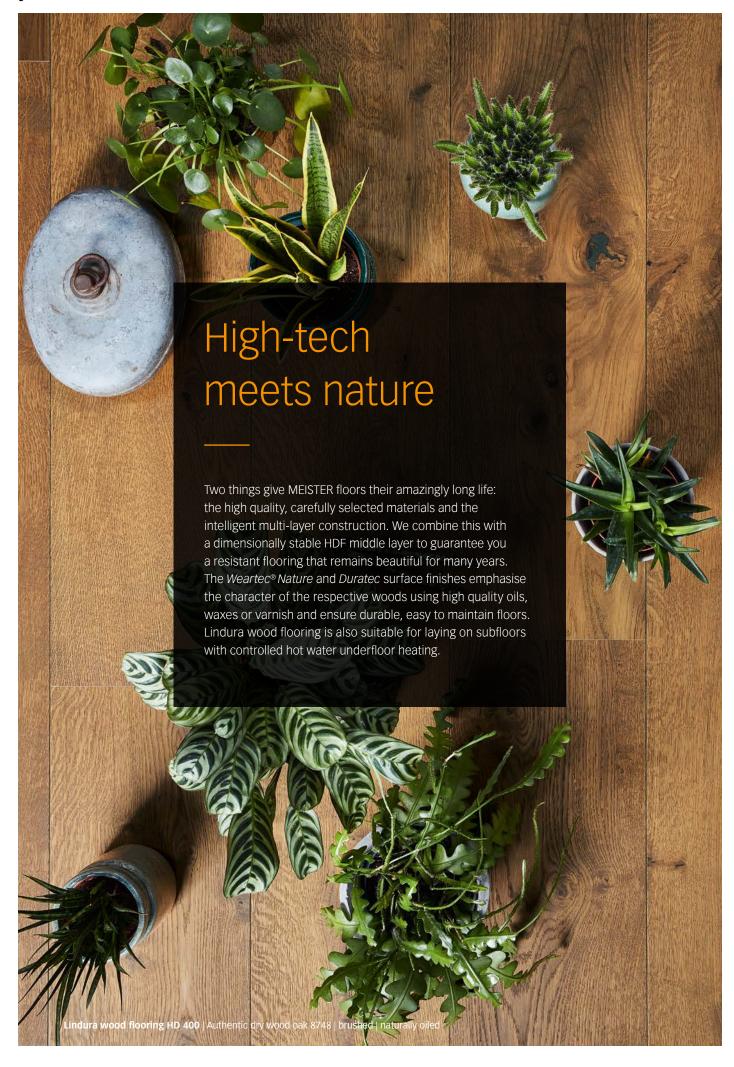


Naturally oiled surface (Weartec® Nature)

Natural oils and waxes penetrate into the wood and form a protective, breathable surface. This type of finish emphasises the grain as well as the structure, has a moisture-regulating effect and ensures a healthy living climate.

Matt lacquered surface (*Duratec*)

7-layer seal with formaldehyde-free, viscoplastic and UV-hardened acrylic lacquer. This lacquer is ecologically non-harmful, and its special

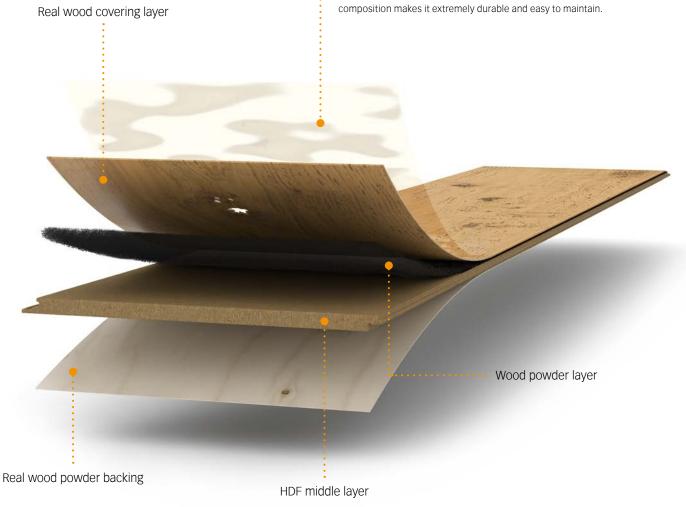

Lindura® | Wood powder technology produced under licence from Välinge.

















Authentic character. Tough floor.

Lindura wood flooring unites all the best traits: Spacious formats, an attractive look in many different variants, and last but not least, the perfect technology. Ultimately, Lindura is the pinnacle of high-tech wood flooring – that is evident in many aspects.

Durable

A comparison test in our laboratory clearly shows: A metal ball dropped with 4,000 newtons of pressure leaves behind a clearly visible dent on standard parquet. With Lindura wood flooring there are hardly any traces to be seen.









Lindura wood flooring



■ Healthy living

Lindura is a natural product. All the materials used are selected carefully and are subject to regular tests in our labs. The installed floor has a moisture-regulating effect and ensures a healthy living climate. It is easy to clean and maintain, making it particularly hygienic. As a result this high-tech wooden floor allows for environmentally friendly and healthy living.





Robust

The real wood covering layer is reinforced with wood powder, which means loads are not a problem for Lindura wood flooring. In fact, Lindura loves challenges and even takes high heels at a party in its stride.



■ Energy-saving

Thanks to its special product structure, Lindura's thermal resistance is particularly low at 0.084 m² K/W when combined with the MEISTER-Silence 25 DB insulating underlay. With a floating installation, the floor covering on top of a hot water underfloor heating should also not exceed the limit of 0.15 m² K/W laid down by regulations* in order to quickly transport the heat supplied to the surface.

 * German Federal Association of Surface Heating and Surface Cooling e. V.

Easy to maintain

The fusion of the real wood covering layer with wood powder closes even the majority of the wood pores. Closed pores reduce the attachment of dirt and simplify cleaning.





Perfect care for Lindura!

Have you heard that wood flooring is difficult to clean and requires intensive maintenance? That's only partly true: With our products precisely tailored for Lindura wood flooring, cleaning and maintenance are incredibly easy – so you can enjoy your flooring for a long time to come!



First clean after installation

Once the floor has been installed, you have to subject it to a thorough clean before it is used for the first time ('cleaning after construction work'). In doing so you remove the dirt and dust caused by the installation and prepare the floor for future use.

To clean naturally oiled Lindura wood flooring, use Dr. Schutz Wood Care diluted with water in a ratio of 1:200. To clean lacquered Lindura flooring, use Dr. Schutz Parquet and Cork Floor Cleaner.

The floor should be wiped damp using a lint free cloth, which has been dipped in this solution and wrung out well. For commercial areas and areas which are particularly highly frequented, such as hallways, kitchens and open-plan living areas with direct access to outdoors, we recommend subsequent treatment with a suitable care oil for naturally oiled surfaces.



Regular cleaning

Normal vacuum cleaning or sweeping is perfectly adequate to remove everyday dirt. For regular cleaning and care, please use Dr. Schutz Wood Care or Dr. Schutz Parquet and Cork Floor Cleaner diluted with water in a ratio of 1:200. Wipe the floor damp using a lint free cloth, which has been dipped in this solution and wrung out well, as with cleaning after construction work.



Refreshing and re-oiling (approx. once a year)

To keep your naturally oiled Lindura wood floor looking beautiful for a long time, we recommend refreshing it with Dr. Schutz H_2Oil as soon as the first signs of wear appear. If the floor has just a normal level of dirt, clean it beforehand using Dr. Schutz Wood Care (1:200); it is best to use a disk buffing machine for larger areas. Ask your retailer about hiring one! After the floor has dried completely, apply Dr. Schutz H_2Oil undiluted very thinly and evenly using a lint free mop. Leave the area to dry for at least 12 hours before use. For highly frequented areas, we recommend regularly reapplying a suitable care oil.

To preserve the quality of lacquered and matt lacquered surfaces, we recommend using Dr. Schutz Wood & Cork Floor Polish matt.

Bona Recoat System

No need for sanding: Overnight flooring renovation

The traditional process of sanding down flooring the way you would with parquet is not possible with Lindura wood flooring, due to its extremely hard real wood covering layer pressed with wood powder. But Lindura can also be renovated, if necessary. The oiled surface of naturally oiled floors can be easily renovated (see item 3, 'Refreshing and re-oiling', above). For less severe damage, partial re-oiling is also an option.

Matt lacquered Lindura wood flooring is very easy to renovate. The Bona Recoat System makes the renovation of ageing flooring fast and cost-effective. This system does not involve the time-consuming stripping of the entire surface down to the raw wood; rather, only the top layer of lacquer is sanded down and resealed. This removes the residue from cleaning products, foot marks, and light scratches; the flooring is ready to use again the next day.

Renovation with the Bona Recoat System:

- 1. Clean the floor thoroughly
- 2. Sand down the floor using the Bona Diamond System
- 3. Vacuum up/wipe up sawdust
- 4. Apply Bona Traffic HD with a roller



You can find further information on renovating matt lacquered Lindura wood flooring on our MEISTER YouTube channel: **youtube.com/MeisterWerkeTV**

2600 x 320 mm


2200 x 270 mm

A format for every floor.

Lindura wood flooring is available in two attractive, exceptional plank formats: 2200×270 mm and 2600×320 mm (matt lacquered: only 2200×270 mm). Both formats' low installation height of 11 mm also makes them suitable for renovations. By the way: Both formats work very well when mixed together in one floor. The blend of formats creates variety and makes the flooring look even more exciting.





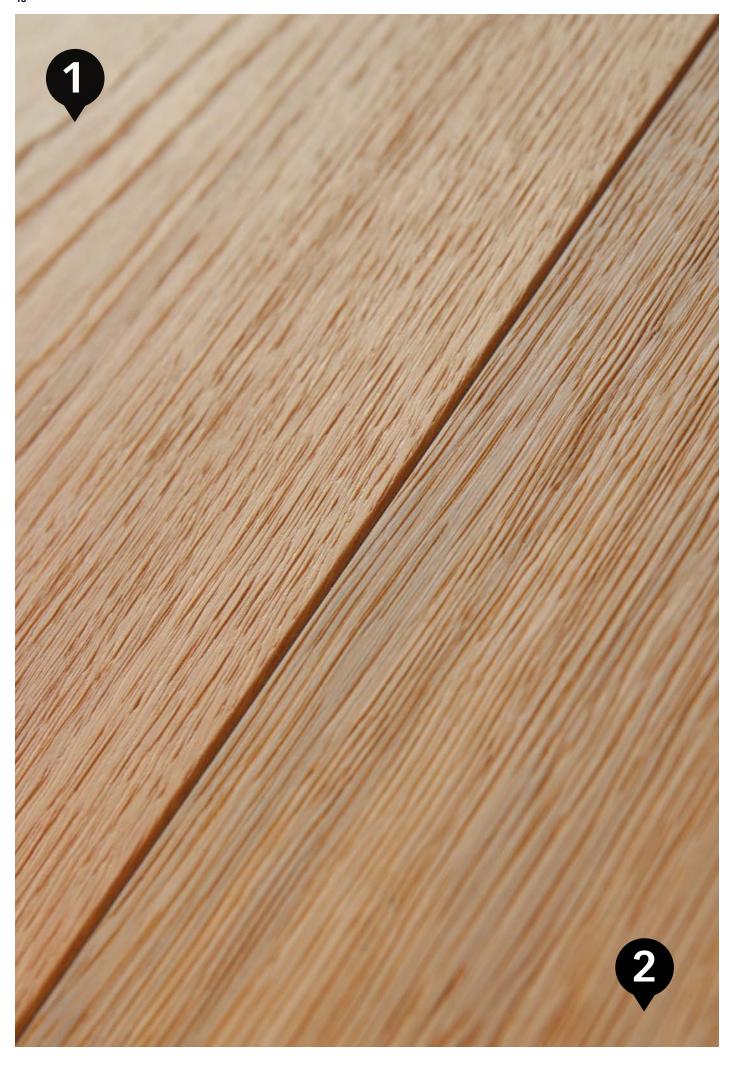

Matt lacquered or naturally oiled – that is the question!

Wood is a valuable, natural resource that we transform into something really special with total respect and a sensitive touch. Our surface finishes with high quality oils or varnishes accentuate the respective wood's character and provide it with long-lasting protection.



Matt lacquered Lindura® wood flooring

Matt lacquer really brings out the wood's character. The wood receives a warm, natural look from this. The environmentally friendly *Duratec* lacquer seal on the Lindura wood flooring is extremely durable and easy to maintain. The entire composition consists of a formaldehyde-free, UV-hardened and ecologically non-harmful acrylic lacquer. This lacquer is particularly durable and abrasion-resistant, because – unlike with parquet flooring – there is no need to consider that the floor may need to be sanded down at some point.



Naturally oiled Lindura® wood flooring

Natural oils and waxes are the basis for our naturally oiled Lindura surfaces. Weartec® Nature penetrates into the wood and forms a protective, breathable surface. This kind of finish creates a natural appearance with subtle brilliance, emphasises the grain as well as structure, has a moisture-regulating effect and ensures a healthy living climate. All Lindura floors with a Weartec® Nature surface are treated so that they are ready for residential use. After installation, they only need to be treated with care oil if they are located in commercial areas or areas where they are subjected to heavy use (such as hallways or kitchens). Additionally, the naturally oiled surface requires a regular polish, which gives the floor a natural shine and ensures exceptional resistance. If required, it can be partly refinished.

What does 'grading' actually mean?

Rustic Authentic



In nature no one tree is like another and even within one tree the wood can have various different types of looks. Exactly the same applies to parquet and Lindura wood flooring too: Every single plank is characterised by its structure, variety of hues, and surface treatment and finish, resulting in different-looking floors that significantly shape the overall impression of a room.


Lively

In this grading we deliberately offer surfaces with strong colours and structures, which emphasise the wood's natural character. Healthy distinctive knots and splints are part of the overall lively image. Like in the 'Natural' grading, cracked knots and cracks are filled perfectly using wood powder technology.

Lindura wood flooring HD 400 | Oak lively 8738 | brushed | matt lacquered

Natural




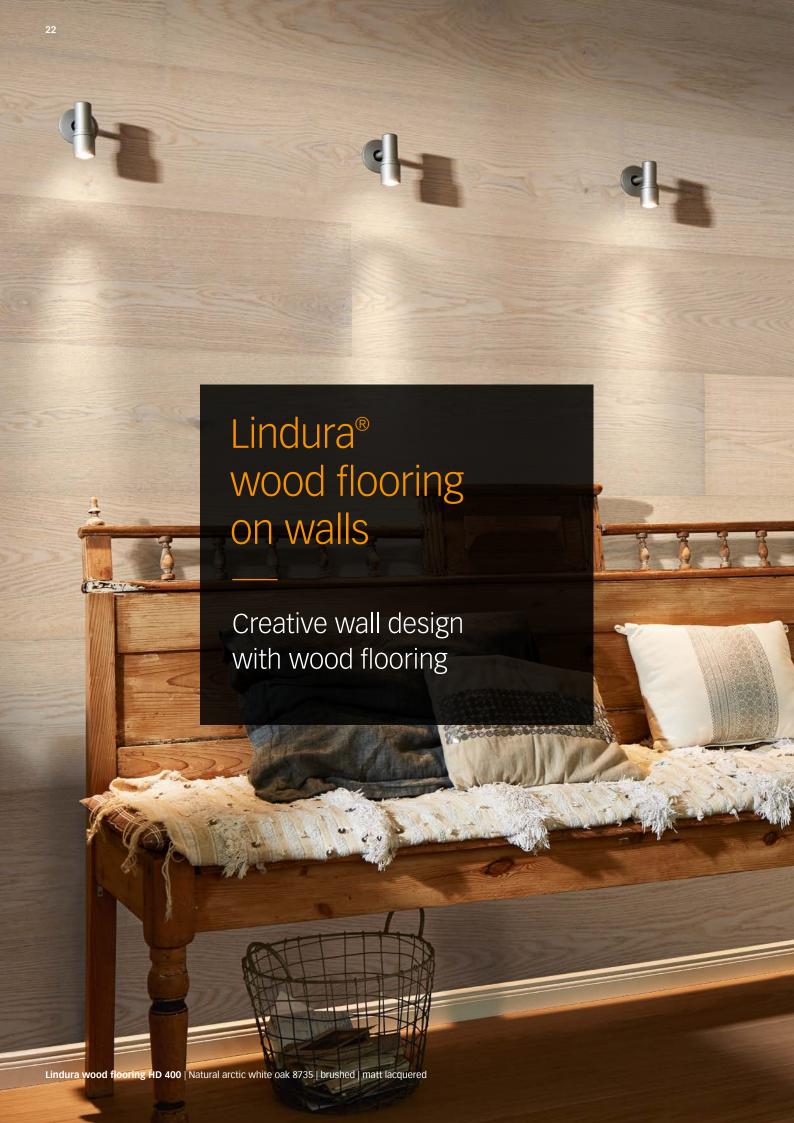



Is it still the floor? Or already the wall? Lines blur when MEISTER takes flooring vertical. How does it work? Amazingly simply! A simple system of metal rails and fixing clips ensures that Lindura wood flooring also cuts a fine figure on the wall. Real life in the third dimension.



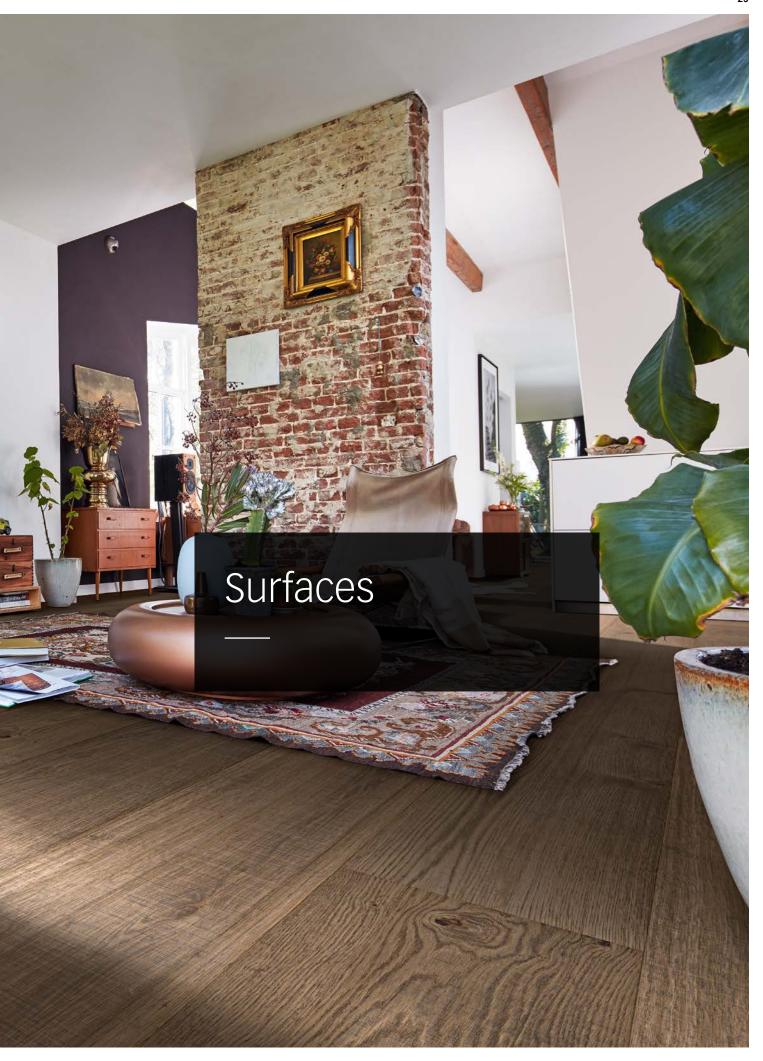

Lindura® wood flooring HD 400

| 1-strip (plank)

| Naturally oiled or matt lacquered

| Longitudinal V-bevel with micro-bevel on the end - in natural | lively | authentic grading

| irregular design, longitudinal V-bevel with micro-bevel on the end in rustic grading

| Click system: Masterclic Plus

| MEISTER warranty*
20 years in living areas,
5 years in commercial areas

| Thickness: 11 mm | Effective measurement:

2600 × 320 mm | 2200 × 270 mm

(naturally oiled surface)

2200 × 270 mm

(matt lacquered surface)

Naturally oiled



Off-white oak lively 8741 | brushed



Authentic white washed oak 8742 | brushed



Pure natural oak 8743 | brushed



Pure rustic oak 8413 | brushed



Café latte rustic oak 8414 | brushed

^{*} Warranty according to the MeisterWerke warranty conditions at www.meister.com




Olive grey rustic oak 8511 | vintage structure, brushed

Page 47



Page 59

Matt lacquered:

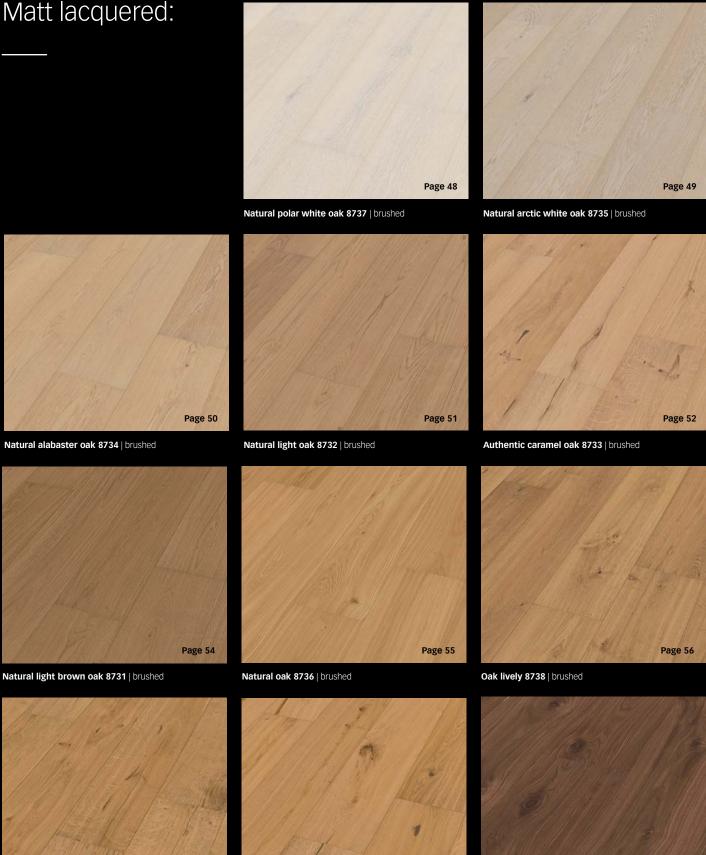

Page 58

American walnut lively 8523


Rustic oak 8520 | brushed

Page 57

Authentic oak 8739 | brushed



 $\textbf{Lindura wood flooring HD 400} \mid \textbf{Off-white oak lively 8741} \mid \textbf{brushed} \mid \textbf{naturally oiled}$

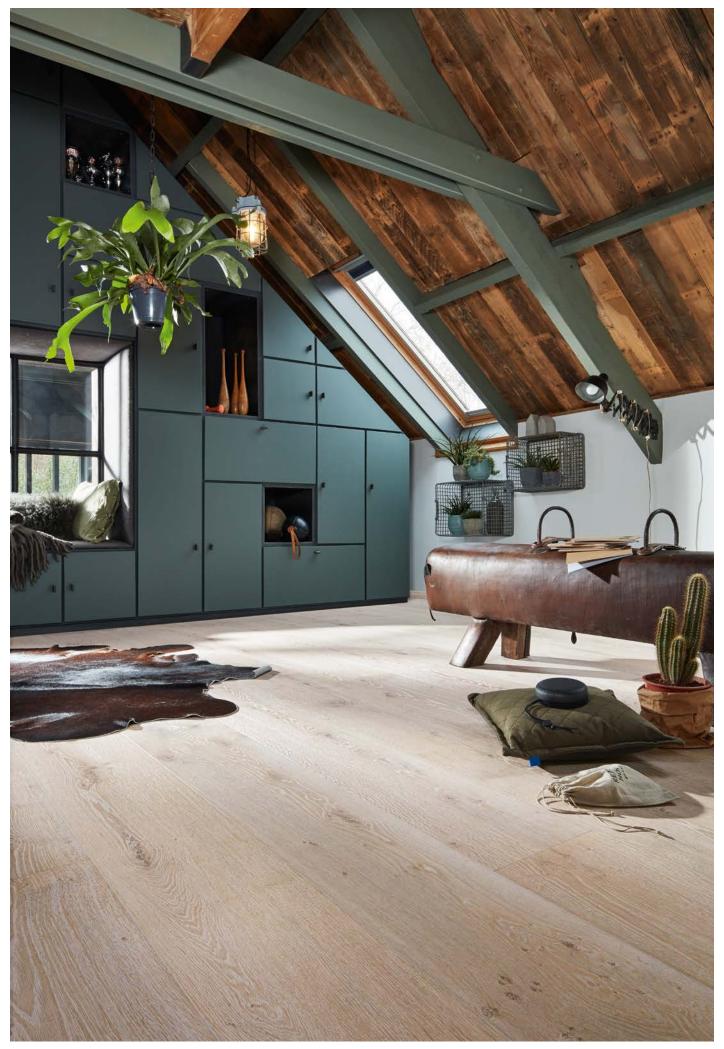


Lindura wood flooring HD 400 | Authentic white washed oak 8742 | brushed | naturally oiled








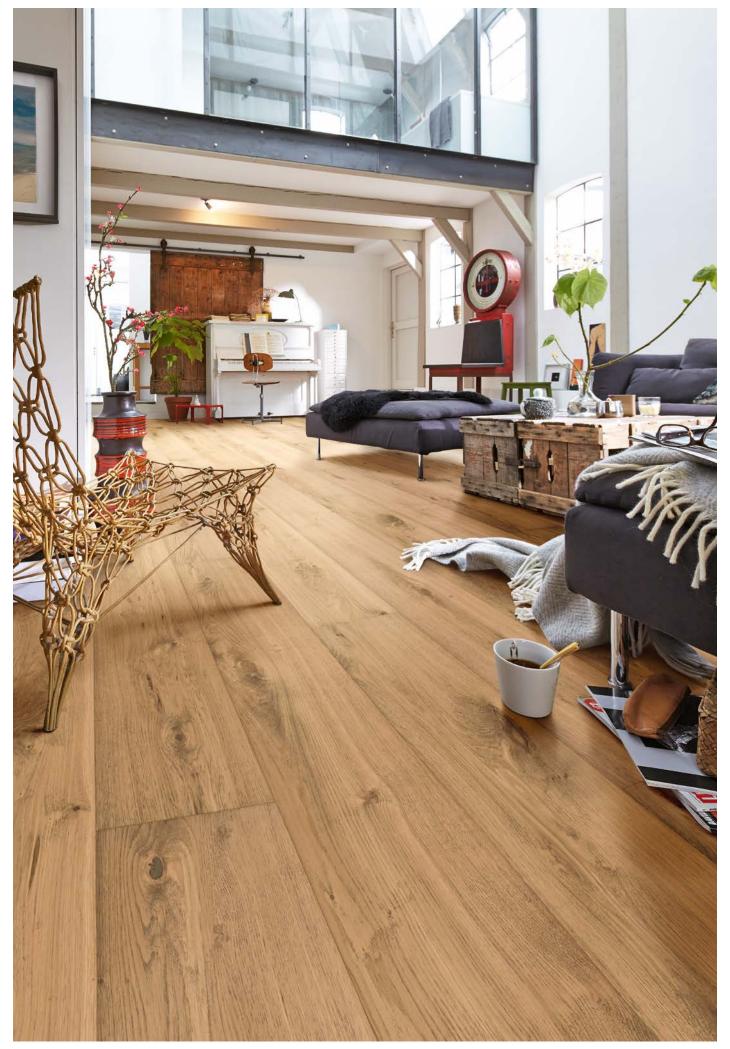


Lindura wood flooring HD 400 | Pure rustic oak 8413 | brushed | naturally oiled




Lindura wood flooring HD 400 | Café latte rustic oak 8414 | brushed | naturally oiled

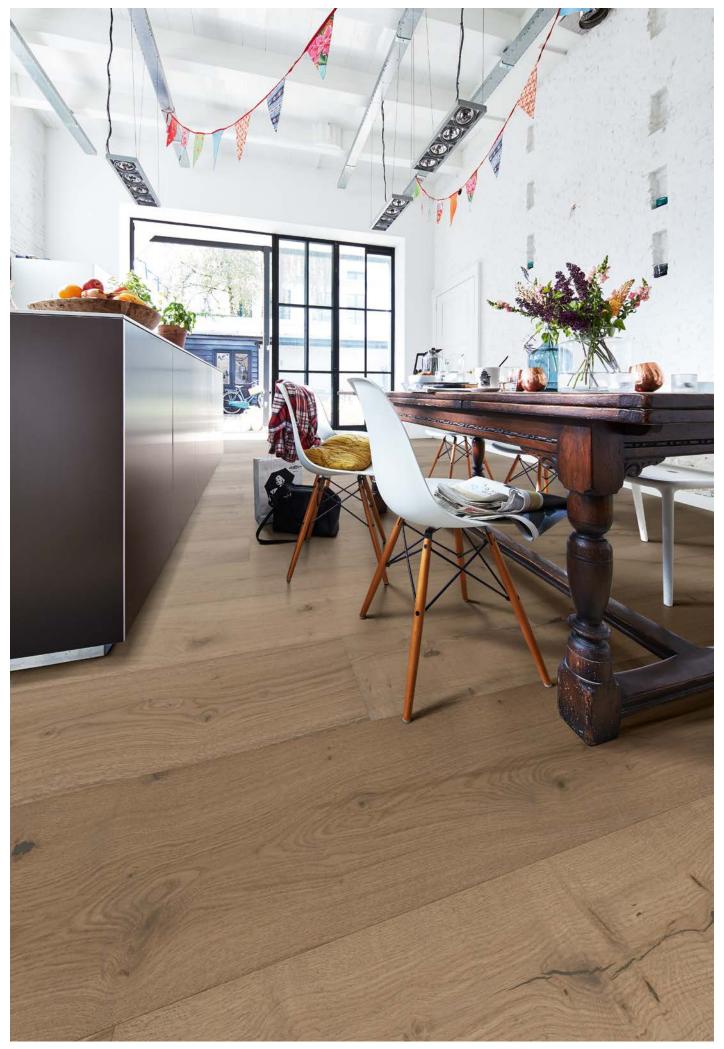

Lindura wood flooring HD 400 | Authentic greige oak 8744 | brushed | naturally oiled

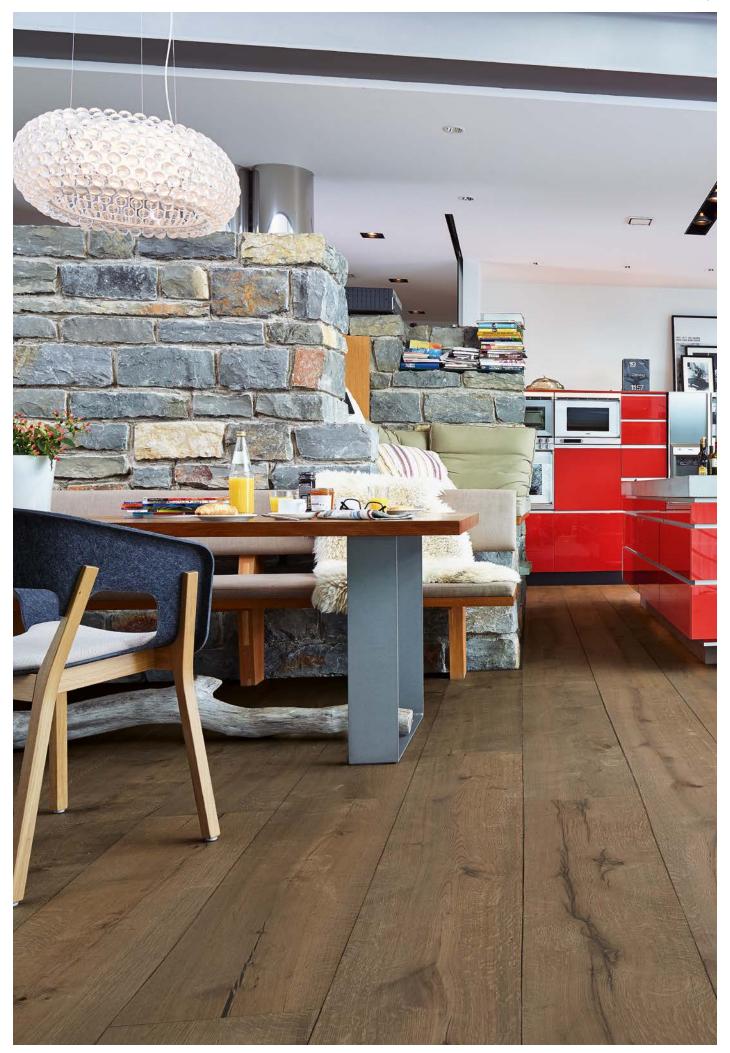

 $\textbf{Lindura wood flooring HD 400} \mid \textbf{Clay grey rustic oak 8411} \mid \textbf{brushed} \mid \textbf{naturally oiled}$

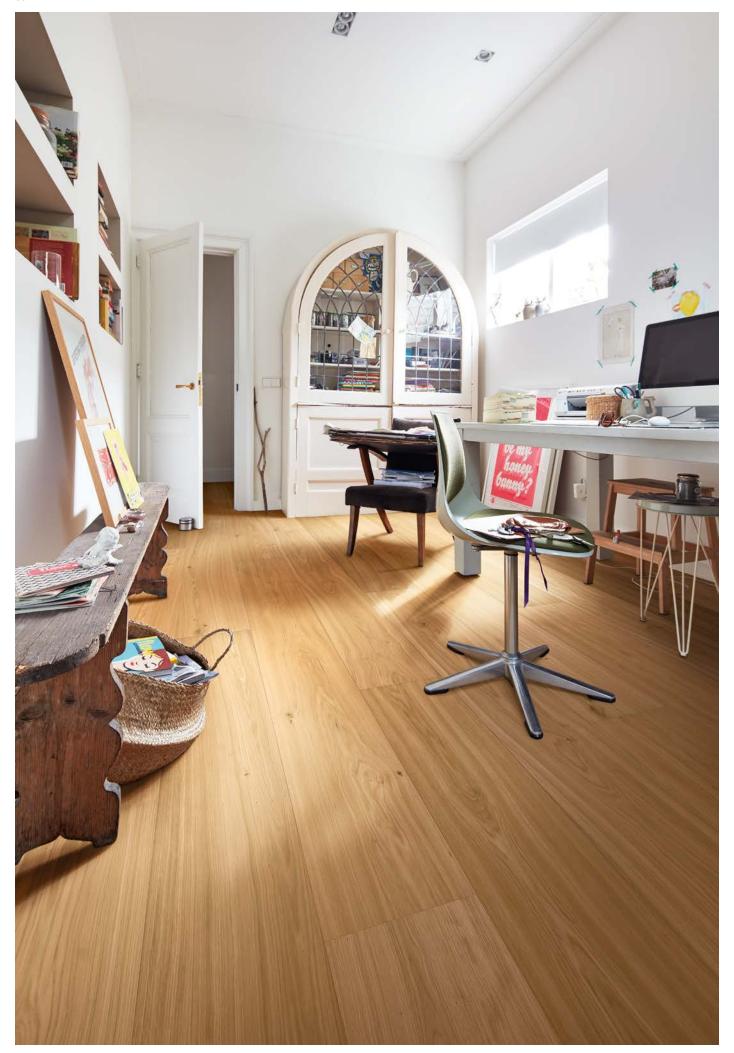



 $\textbf{Lindura wood flooring HD 400} \mid \textbf{Natural oak 8745} \mid \textbf{brushed} \mid \textbf{naturally oiled}$



 $\textbf{Lindura wood flooring HD 400} \mid \textbf{Oak lively 8417} \mid \textbf{brushed} \mid \textbf{naturally oiled}$



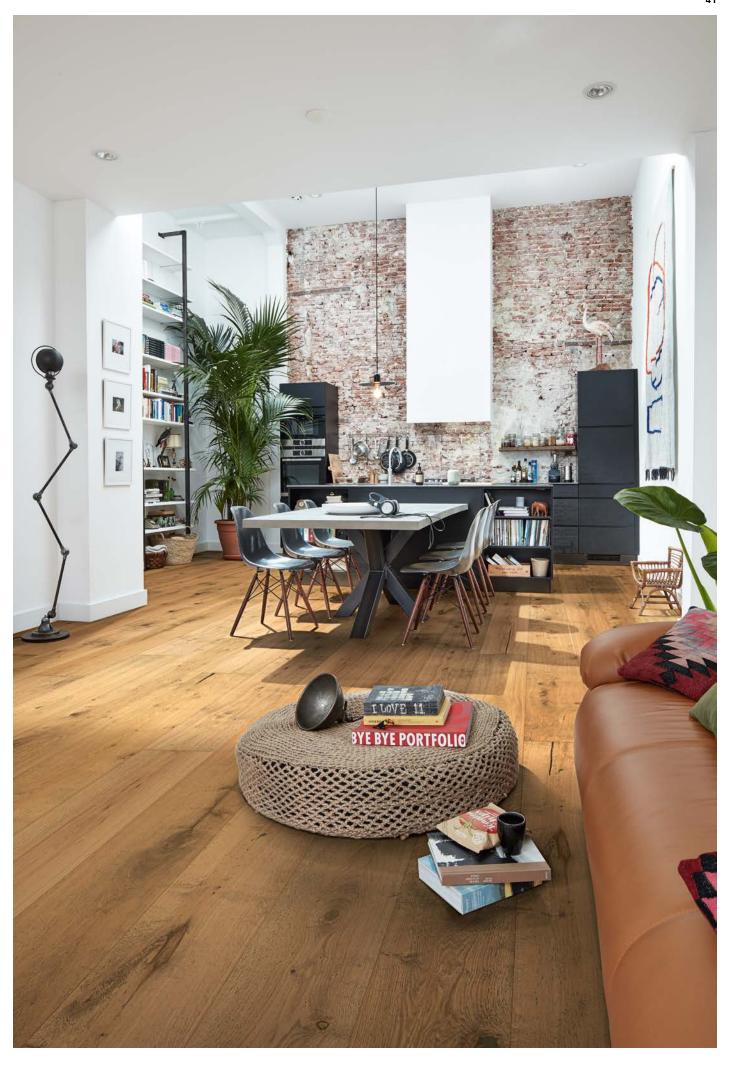

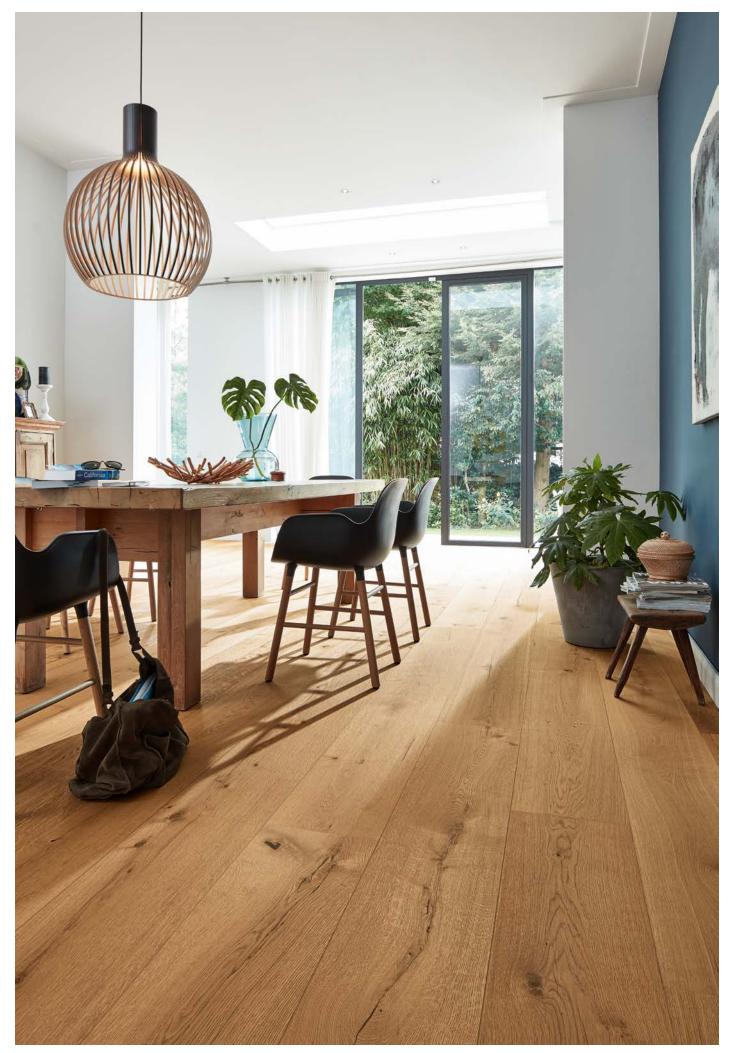


Lindura wood flooring HD 400 | Authentic oak 8746 | brushed | naturally oiled




Lindura wood flooring HD 400 | Cappuccino oak lively 8747 | brushed | naturally oiled






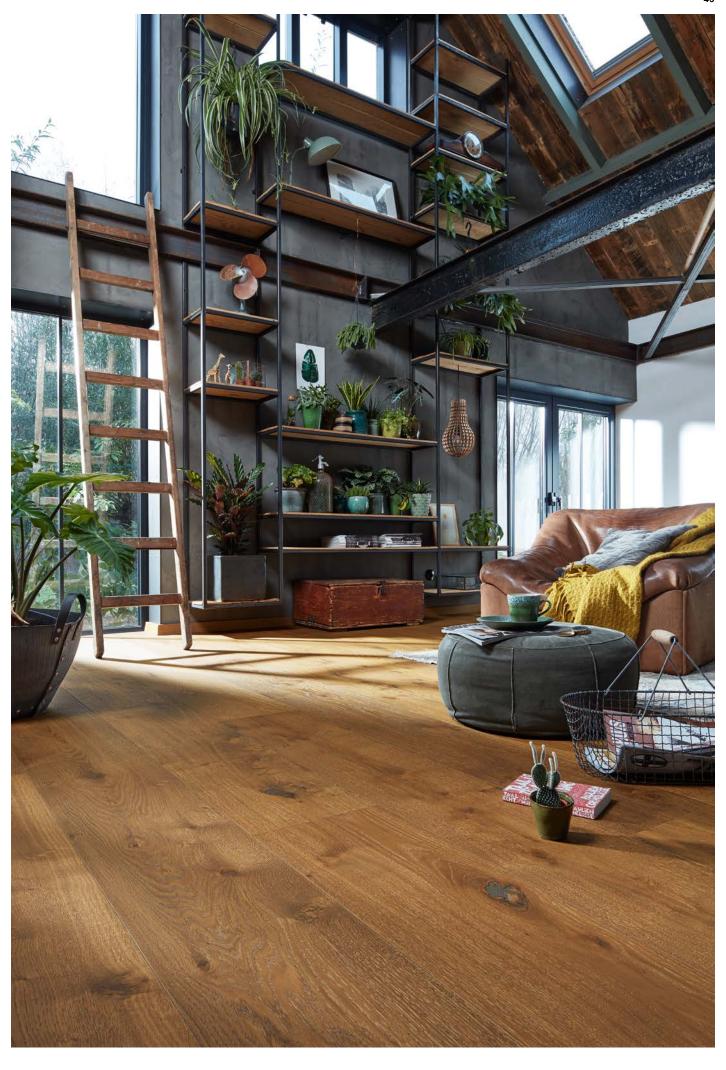

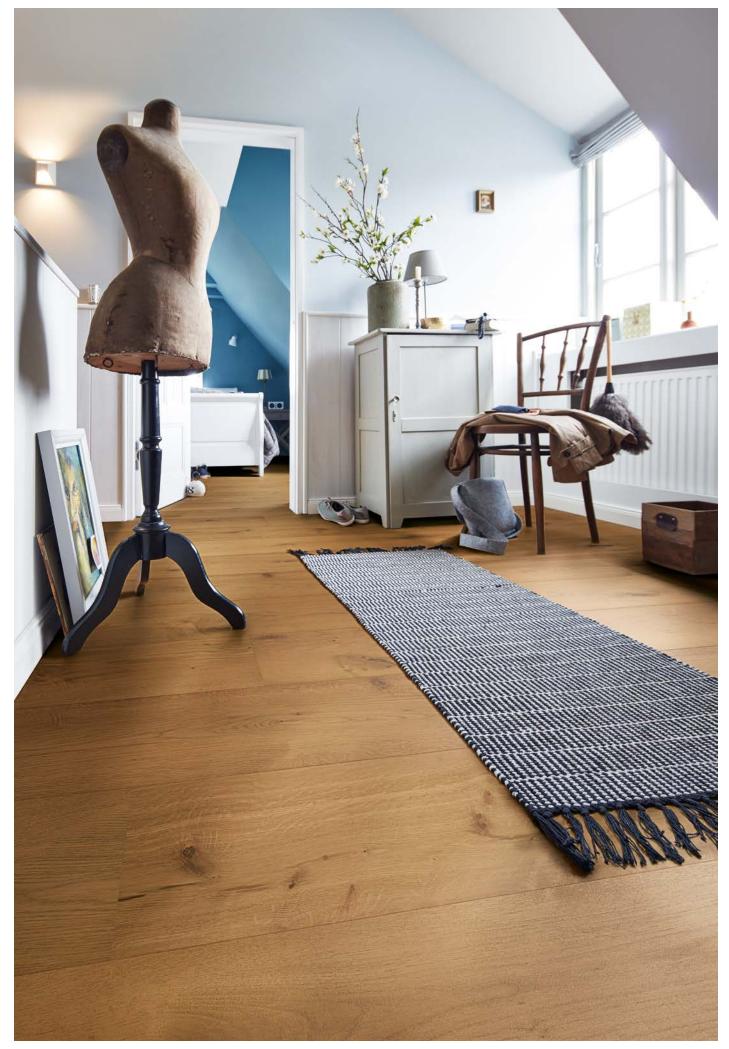

 $\textbf{Lindura wood flooring HD 400} \mid \textbf{Golden brown rustic oak 8514} \mid \textbf{brushed} \mid \textbf{naturally oiled}$

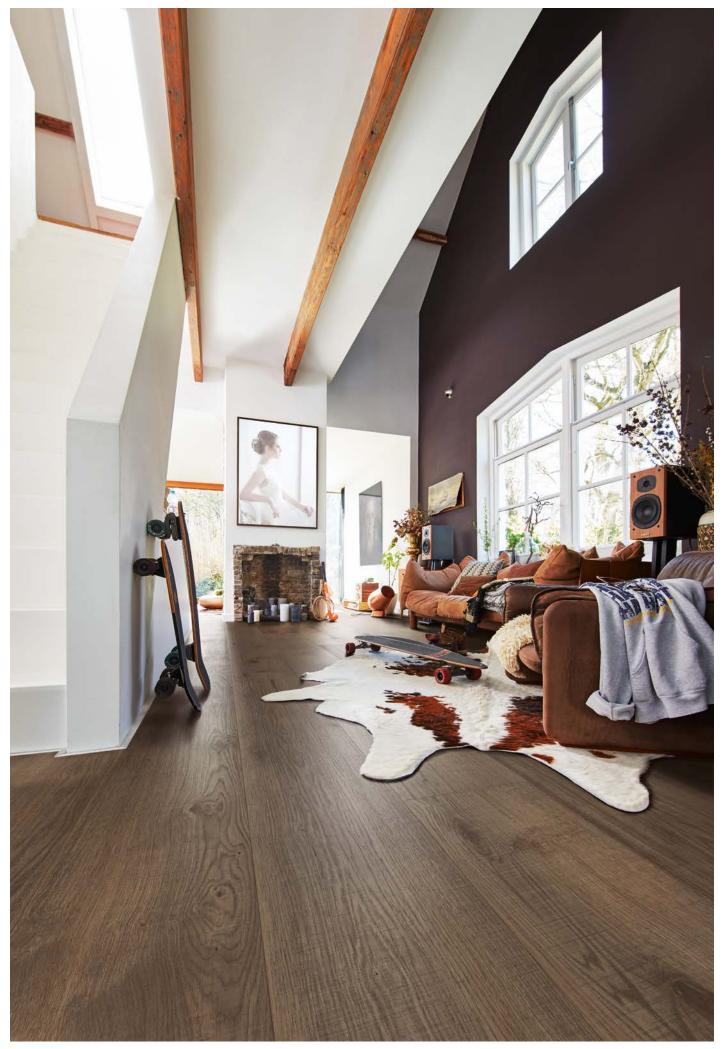


Lindura wood flooring HD 400 | Olive grey rustic oak 8511 | vintage structure, brushed | naturally oiled




 $\textbf{Lindura wood flooring HD 400} \mid \textbf{Natural polar white oak 8737} \mid \textbf{brushed} \mid \textbf{matt lacquered}$



 $\textbf{Lindura wood flooring HD 400} \mid \textbf{Natural arctic white oak 8735} \mid \textbf{brushed} \mid \textbf{matt lacquered}$

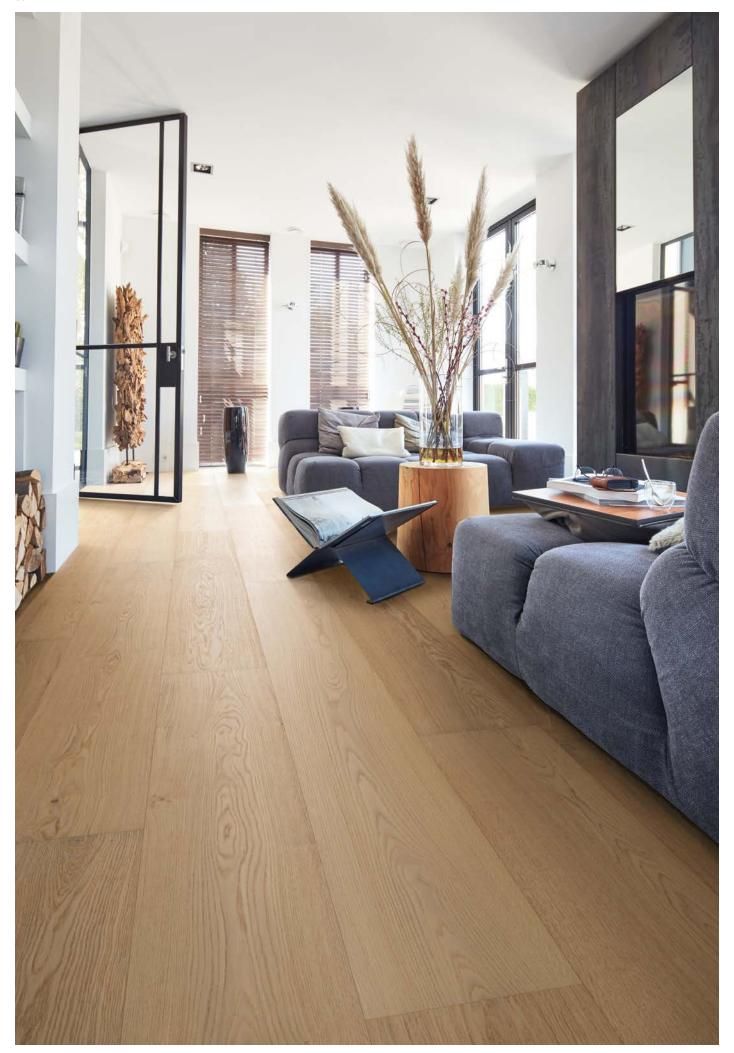

Lindura wood flooring HD 400 | Natural alabaster oak 8734 | brushed | matt lacquered

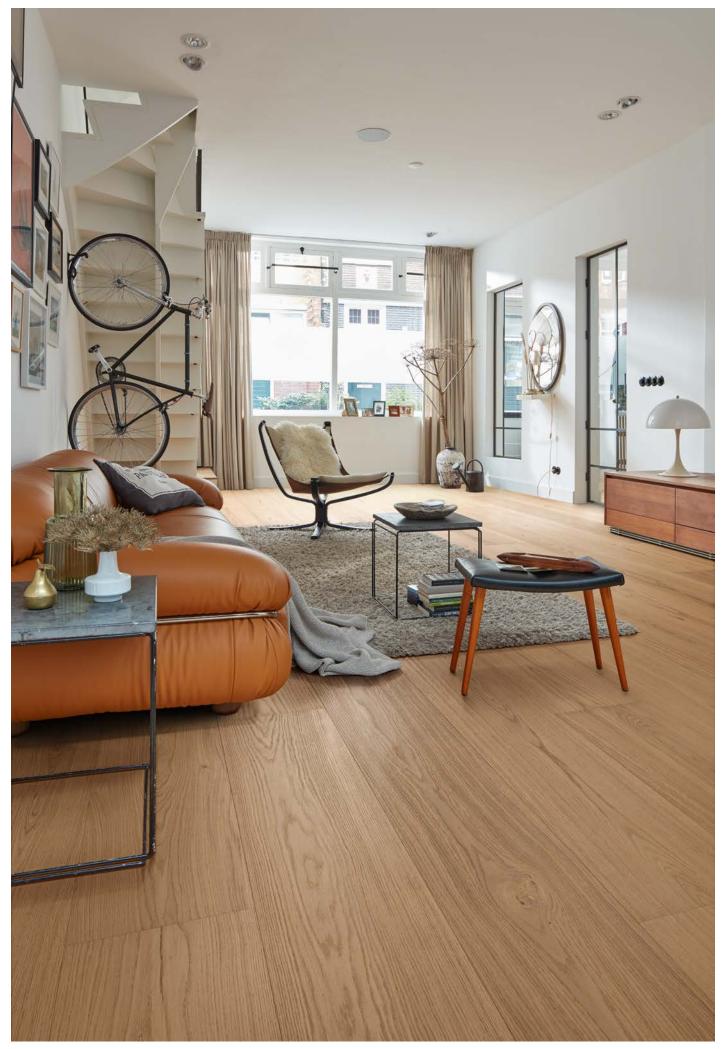

 $\textbf{Lindura wood flooring HD 400} \mid \textbf{Natural light oak 8732} \mid \textbf{brushed} \mid \textbf{matt lacquered}$







Lindura wood flooring HD 400 | Natural light brown oak 8731 | brushed | matt lacquered



Lindura wood flooring HD 400 | Natural oak 8736 | brushed | matt lacquered




Lindura wood flooring HD 400 | Oak lively 8738 | brushed | matt lacquered



 $\textbf{Lindura wood flooring HD 400} \ | \ \text{Rustic oak 8520} \ | \ \text{brushed} \ | \ \text{matt lacquered}$




 $\textbf{Lindura wood flooring HD 400} \ | \ \text{Authentic oak 8739} \ | \ \text{brushed} \ | \ \text{matt lacquered}$

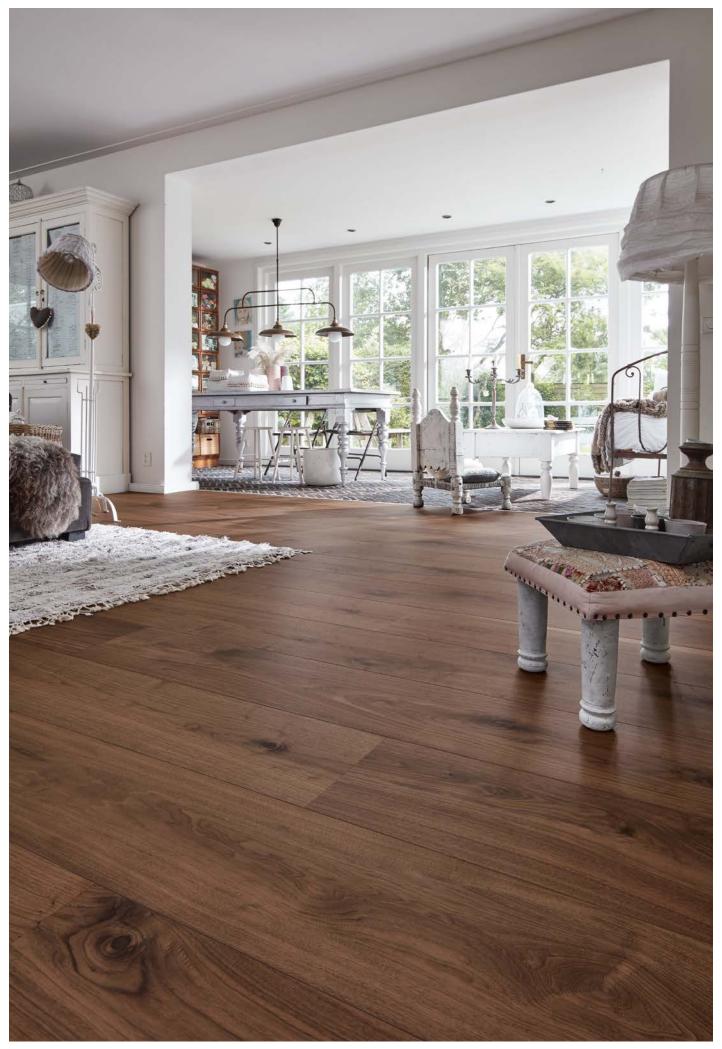

Lindura wood flooring HD 400 | American walnut lively 8523 | matt lacquered





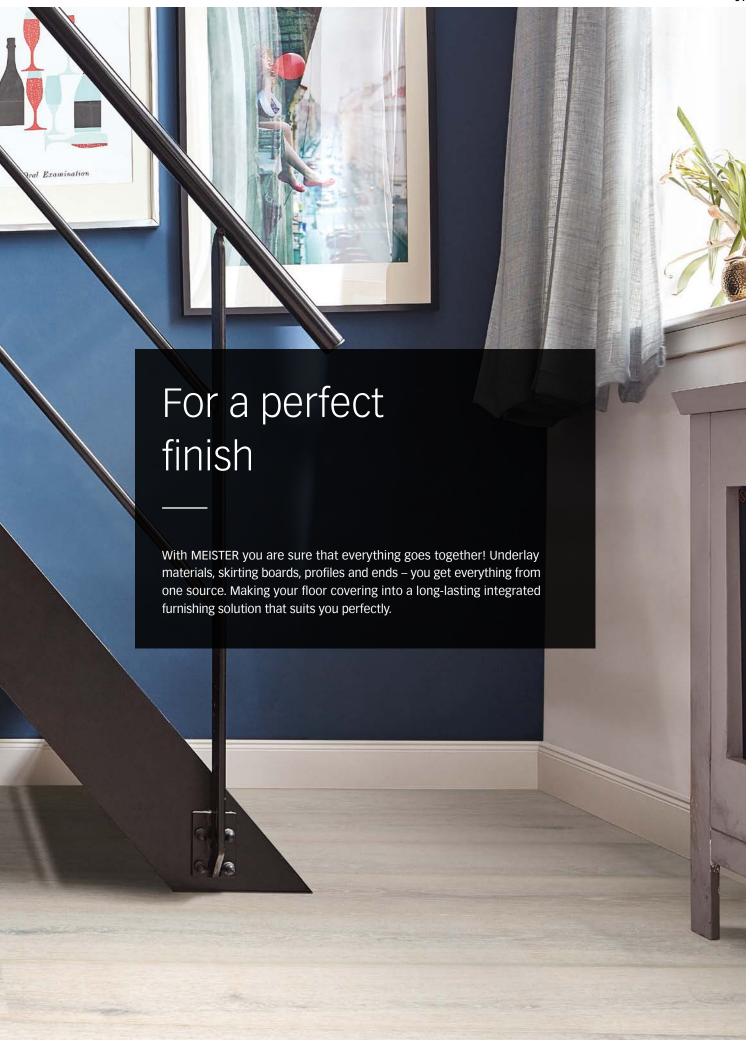

Open to all styles – white skirting boards.

What does white have that other colours don't have? Openness that adapts to any style and the ability to effortlessly complement all other colours. That is why our skirting boards with white decorative film enrich any living style and can be superbly combined with all floors. The large selection of different profile shapes enables you to also create classical and modern touches totally to your taste.



Skirting board 8 PK profile | Plain white gloss 324 (decorative film)



Skirting board 19 PK profile | Plain white gloss 324 (decorative film)



Skirting board 8 PK profile | White, can be painted 2222 (individual colour)

Colourful and with plenty of character – skirting boards you can paint yourself.

In the colour of your wall? To match your furniture? Or completely different? It's up to you: design your skirting boards totally according to your own ideas! Covered in a film that can be painted, these mouldings are the perfect canvas for you to realise your artistic vision. Let your creativity run wild!

A balanced look – harmonious skirting boards.

You quite rightly would like pure harmony within your own four walls, and that's from the ground up. You can achieve this effortlessly with skirting boards coordinated to the colour or decor of your floor. The balanced interplay between the floor and moulding is rounded off by the impressively consistent decor from moulding to moulding. This is how good perfect harmony looks.



Skirting board 3 PK profile | Golden brown oak 1165

Beautifully versatile: Skirting profiles at a glance



Skirting board Profil 2 PK



Skirting board Profil 3 PK



Skirting board Profil 5 PK




Skirting board Profil 6



Quarter round Profil 7



Skirting board Profil 8 PK




Skirting board Profil 9 PK




Skirting board Profil 10 PK Profil 10 F MK



Skirting board Profil 11 PK Profil 11 F MK



Skirting board Profil 12 PK Profil 12 F MK



Skirting board Profil 13 PK



Skirting board Profil 14 MK Profil 14 F MK



Skirting board Profil 15 MK Profil 15 F MK



Skirting board Profil 16 MK



Skirting board Profil 17



Skirting board Profil 18 PK



Skirting board Profil 19 PK



Skirting board Profil 20 PK



Skirting board Profil 20 PK Aqua



Skirting board Profil 21 F MK



Skirting board Profil 22 F MK



Skirting board Profil 23 F MK

Profile PK | MK:

Base material MDF (PK Aqua: Base material ABS)

Profile F MK:

Base material spruce

'How to': Mouldings accessories

To ensure that even difficult corners and edges fit perfectly, MEISTER offers internal corners, external corners, end caps and connection pieces to match many mouldings. You can find the whole range at www.meister.com. Here, you will also find an overview of the different profiles available for aligning adjacent floor coverings or French windows, suitable radiator rosettes, door

stoppers and our recommended cleaning and protective care agents.











The complete system counts: Underlay for high-quality flooring

Without good underlay, it's not a good floor. The underlay material has a significant influence on the durability of the flooring and is an important component of how the entire system functions as far as day-today wear is concerned. Premium-quality flooring may suffer damage when laid on poor-quality underlay. High-quality underlay, on the other hand, ensures that your flooring will bring you lasting enjoyment; it prevents damage to the click connections through optimum pressure stability, for example, whereas excessively soft underlay can have a significantly negative effect on fold-down connections. When choosing an underlay material, both the sub-flooring

and the flooring to be installed are important. Whether your sub-flooring is concrete, wooden floorboards, drywall or existing flooring such as tiles or stone: With a comprehensive underlay range, MEISTER ensures that every MEISTER floor can be laid on your sub-flooring.

Sub-flooring Underlay	Silence 25 DB	Silence 20	Silence 15 DB	Twin Control	Foam film	PE-film
Nooden planks	-	√	-	-	√	_
Wood based boards, OSB boards, drywall elements	-	√	-	-	√	-
Mineral subfloors e.g. cement screed, anhydride screed)	√	√ with PE-film	√	√	√ with PE-film	√
Mastic asphalt screed	-	√	-	-	√	-
Existing coverings i.e.g. ceramic tiles and boards, natural	√	✓ with PE-film	✓	✓	√ with PE-film	√

The MEISTER underlay materials:

Thanks to the special PUR mineral blend, MEISTER-Silence 25 DB, MEISTER-Silence 20 and MEISTER-Silence 15 DB are the perfect insulating underlay for effective sound absorption in the room and reduction of footfall transmitted to the rooms below. The high self-weight of the products also further improves their sound-absorbing properties. In the case of Silence 25 DB and 15 DB the vapour barrier is already integrated, eliminating the need to lay an additional PE film. This is also true for MEISTER Twin Control. The insulating underlay made from closed-cell, moisture-resistant, permanently elastic extruded polyurethane foam also features a practical, integrated self-adhesive strip along its length. With a roll length of 25 m, it is fast and easy to lay and additionally offers excellent footfall noise reduction. MEISTER foam film is an insulating underlay with a higher density than many other

commercially available foam films; in combination with MEISTER PE-film, it provides optimum moisture protection.

All MEISTER underlay materials can be installed on underfloor heating. They comply with the technical bulletin provided by the European Producers of Laminate Flooring (EPLF) based on CEN/TS 16354. The Silence products also meet the requirements of the technical bulletin issued by the Multilayer Modular Flooring Association (MMFA): 'Underlay Materials under Multilayer Modular Floor Coverings (MMF) – Test Standards and Performance Indicators' for Class 1 (with HDF core).

- 1. MEISTER Silence 25 DB with integrated vapour barrier | 3 mm
- 2. MEISTER-Silence 20 | 2.5 mm
- 3. MEISTER Silence 15 DB with integrated vapour barrier | 2 mm
- 4. MEISTER Twin Control integrated vapour barrier and adhesive strips | 2 mm
- 5. MEISTER foam film | 2 mm











